(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 28 July 2005 (28.07.2005)

PCT

(10) International Publication Number WO 2005/069554 A1

(51) International Patent Classification⁷: H04L 12/56

(21) International Application Number:

PCT/EP2004/000205

(22) International Filing Date: 14 January 2004 (14.01.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): TELE-FONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-164 83 Stockholm (SE).

(72) Inventors; and


(75) Inventors/Applicants (for US only): SACHS, Joachim [DE/DE]; An Den Finkenweiden 43, 52074 Aachen (DE). LUDWIG, Reiner [US/DE]; Bergstrasse 18, 52393 Huertgenwald (DE). WIEMANN, Henning [DE/DE];

Monheimsallee 29, 52062 Aachen (DE). **MEYER, Michael** [DE/DE]; Grossheidstrasse 27, 52080 Aachen (DE).

- (74) Agents: HOFFMANN EITLE et al.; Arabellastrasse 4, 81925 München (DE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: METHODS AND DEVICES FOR CONTROLLING DATA UNIT HANDLING

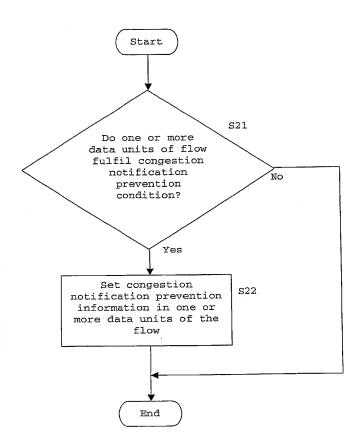

(57) Abstract: It is proposed to modify data unit handling on the side of a sender (e.g. a sending end-point or a proxy) by introducing congestion notification prevention information into data units, such that a queue buffer that implements a procedure for performing congestion notification with respect to one or more queued data units (e.g. dropping and/or marking data units with explicit congestion information) is capable of preventing the performance of a congestion notification at least with respect to the data units containing the congestion notification prevention information.

WO 2005/069554 A1



Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

with international search report